

TELEPHONE: (814) 643-3966  
(814) 643-3967

## Borough of Huntingdon

FAX: (814) 643-2644

530 WASHINGTON STREET  
P.O. BOX 592  
Huntingdon, Pennsylvania 16652-0592

### SIDEWALK PERMIT

\_\_\_\_\_  
DATE

PERMIT NO. \_\_\_\_\_

FEE CHARGED \_\_\_\_\_

APPLICANT: OWNER OF PROPERTY

CONTRACTOR: (IF APPLICABLE)

\_\_\_\_\_  
NAME

\_\_\_\_\_  
NAME

\_\_\_\_\_  
ADDRESS

\_\_\_\_\_  
ADDRESS

REPAIR

REPLACE

CONSTRUCT

LOCATION OF PROPERTY \_\_\_\_\_

SIDEWALK DIMENSIONS \_\_\_\_\_


I HEREBY STATE THAT I WILL COMPLY WITH ALL REQUIRED LOCAL, STATE AND FEDERAL LAWS AND HAVE PAID ALL REQUIRED FEES.

\_\_\_\_\_  
APPLICANT SIGNATURE

APPROVED: \_\_\_\_\_

RECEIVED: \_\_\_\_\_

BY: \_\_\_\_\_

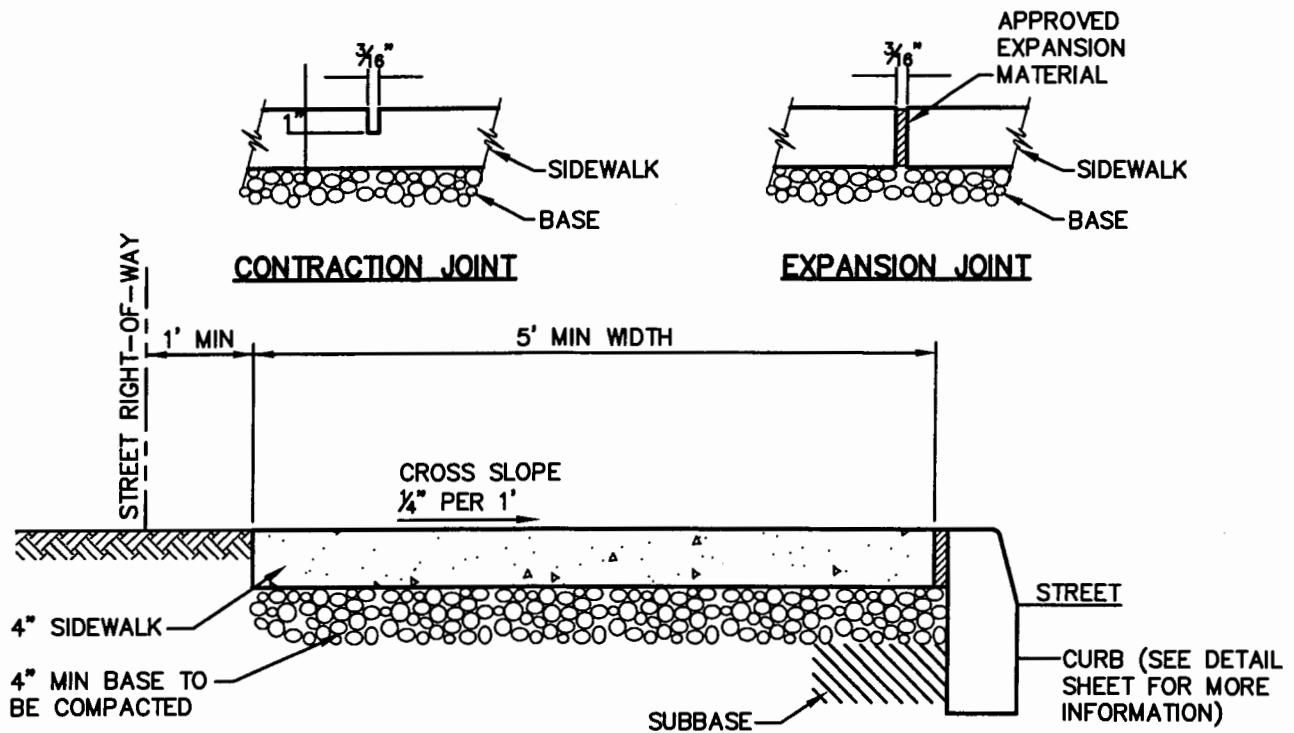

**NOTES:**


1. SIDEWALK SHALL BE CONSTRUCTED WITH THE FOLLOWING JOINTS:
  - A. CONTRACTION JOINTS (SEE DETAIL) ARE TO BE PROVIDED EVERY 5' EXCEPT WHERE EXPANSION JOINTS ARE TO BE PLACED.
  - B. EXPANSION JOINTS (SEE DETAIL) SHALL BE PROVIDED EVERY 20'
2. SIDEWALK CONSTRUCTION MUST BE KEPT WITH IN THE STREET RIGHT-OF-WAY UNLESS PERMISSION IS GRANTED FROM PROPERTY OWNER.
3. SIDEWALK SHALL BE CONSTRUCTED ACCORDING TO THE LAND AND GRADE OBTAINED BY THE PROPERTY OWNER FROM THE BOROUGH.
4. WITHIN 48 HOURS AFTER COMPLETION OF SIDEWALK, OWNER SHALL NOTIFY HUNTINGDON BOROUGH FOR INSPECTION.
5. SIDEWALK SHALL BE CONSTRUCTED SO AS TO DRAIN TO THE ROAD. THE SIDEWALK SHALL HAVE A CROSS SLOPE OF  $\frac{1}{4}$ " OF FALL PER 1' OF WIDTH.
6. MATERIALS – SIDEWALK–CLASS A CONCRETE W/ A MINIMUM 7 DAY COMPRESSIVE STRENGTH OF 2750 LBS/SQ. IN. AND A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 3300 LBS./SQ. IN.,  
BASE– $\frac{3}{4}$ " DIAMETER STONE, (PENNDOT CLASSIFICATION NUMBER 2A) AND SUBBASE–DRY, FIRM NATIVE MATERIAL.
7. SIDEWALKS EXPECTED TO CARRY REGULAR VEHICLE TRAFFIC, SUCH AS DRIVEWAY CROSSINGS, SHALL HAVE WELDED WIRE FABRIC PLACED IN THE CONCRETE. SEE THE "TYPICAL DRIVEWAY DEPRESSED CURB" FOR MORE INFORMATION.
8. THE BOROUGH RESERVES THE RIGHT TO REQUIRE THAT SIDEWALK OPENINGS BE PROVIDED FOR GREENERY.
9. CURB AND SIDEWALK MAY BE POURED MONOLITHICALLY PROVIDING A SAW CUT IS MADE TO SEPARATE CURB FROM SIDEWALK, AND EXPANSION JOINT MATERIAL IS PLACED AT BACK OF SIDEWALK WHERE IT ABUTS A BUILDING FOUNDATION OR OTHER SOLID MASS.
10. "ALL SIDEWALKS AND CURBS SHALL BE CONSTRUCTED, RECONSTRUCTED AND REPAIRED AND THE GRADING THEREOF SHALL BE DONE UPON AND ACCORDING TO THE LINE AND GRADE THEREFOR OBTAINED BY THE THE PROPERTY OWNER FROM THE BOROUGH." BOROUGH CODE 177-18

**SIDEWALK DETAIL**

**CET Engineering Services**

HUNTINGDON, PENNSYLVANIA

DATE	REVISIONS
11/03	ADDED NOTE 8
10/04	ADDED NOTE 9
10/22/04	ADDED NOTE 10
SCALE NO SCALE	FILE 1383.Misc SIDEWALK DETAIL

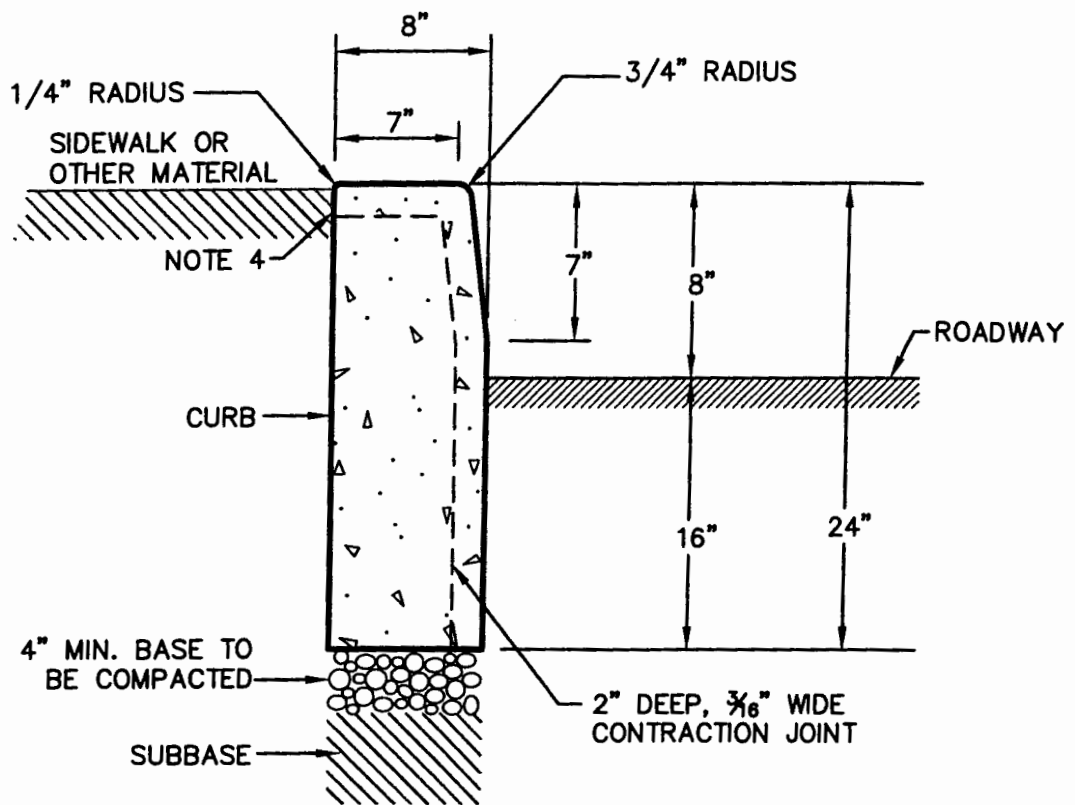

## NOTES:

1. CURB SHALL BE CONSTRUCTED ACCORDING TO THE LINE AND GRADE OBTAINED BY THE PROPERTY OWNER FROM THE BOROUGH.
2. CURB SHALL BE CONSTRUCTED WITH THE FOLLOWING JOINTS:
  - A. CONTRACTION JOINT EVERY 10' - 2" DEEP CUT ALONG TOP AND FRONT OF CURB AS SHOWN BY DASHED LINE ABOVE.
  - B. EXPANSION JOINTS WITH APPROVED EXPANSION MATERIAL WHERE NEW CURB ABUTS EXISTING CURB.
3. MATERIALS - CURB-CLASS A CONCRETE, BASE- 3/4" DIAMETER STONE, (PENNDOT CLASSIFICATION NUMBER 2A) AND SUBBASE-DRY, FIRM NATIVE MATERIAL.
4. WHEN SIDEWALK ABUTS CURB, PLACE APPROVED EXPANSION MATERIAL ALONG THE LENGTH OF THE JOINT BETWEEN THE SIDEWALK AND CURB.

## CONCRETE CURB DETAIL

**CET Engineering Services**

DATE	REVISIONS

SCALE